

Flatproofing Performance Warranty

Terms and Conditions

Arnco's products are warranted subject to the following conditions:

- 1. Tires must be properly filled using suitable equipment and procedures.*
- 2. The tire manufacturer's rated loads and speeds must not be exceeded.*
- 3. Final tire pressure using Arnco's products must be the same as the required air pressure for the maximum loads to be used.*
- 4. Tires must be free of manufacturing defects.*
- 5. Warranty speeds are reduced by 10 mph for tires larger than 11.5 x 22.5.*
- 6. Arnco's lot numbers, filling dates, tire sizes and manufacturer, tire pressures, and operator's identity must be recorded.*
- 7. Damage to tires as a result of road hazards is excluded from Arnco's warranty.*

Notice of a claim under this warranty must be given to Arnco promptly, and in no case later than 45 days after the breach occurs. The exclusive and sole remedy for a claim under this warranty is replacement or repair of the filled tire.

LIMITATION OF WARRANTY

This Performance Warranty is in lieu of all other warranties, express or implied, including any implied warranty of merchantability or fitness for a particular purpose. The replacement or remedy of repair is the sole and exclusive remedy for Arnco's obligations arising from the sale of its products.

Arnco will not, under any circumstances, be liable for consequential or incidental loss or damage, including, and without limitation: damage to property, loss of profits, loss of goodwill or other economic losses, whether such consequential or incidental loss or damage is claimed on account of breach of contract, breach of warranty, negligence, strict liability in tort, or any other legal theory.

Goods sold for resale are all subject to the aforementioned terms, and all offers are expressly conditioned upon acceptance of these terms.

This writing constitutes the sole and only warranty relating to Arnco products. Any prior agreements, promises or representations by Arnco or its agents which are not expressly set forth in this warranty are of no force or effect.

Corporate Headquarters: 5141 Firestone Place, South Gate, CA 90280 USA

Phone: (323) 249-7500 FAX: (323) 249-7507

E-MAIL: arnco@arnconet.com WEBSITE: www.arnconet.com

Sales & Technical: 4005 Industry Drive, Chattanooga, TN 37416 USA

Phone: (800) 821-4147 FAX: (423) 499-3788



The Tire Flatproofing Experts


Flatproofing Performance Warranty

Tires properly flatproofed with RePneu,[®] SuperFlex,[®] HeviDuty,[®] or RePneu II,[®] are warranted¹ for continuous service at speeds up to 35 mph (56 kph). Alternatively, tires properly flatproofed with RePneu,[®] SuperFlex,[®] HeviDuty,[®] or RePneu II,[®] are warranted for service at speeds of up to 55 mph (88 kph), per the table below:

Duty Cycle @ 55 mph

	In Service	Cool Down
RePneu	8 hrs	16 hrs
HeviDuty	8 hrs	16 hrs
SuperFlex	2 hrs	10 hrs
RePneu II	4 hrs	12 hrs

48 Hour Duty Cycles²

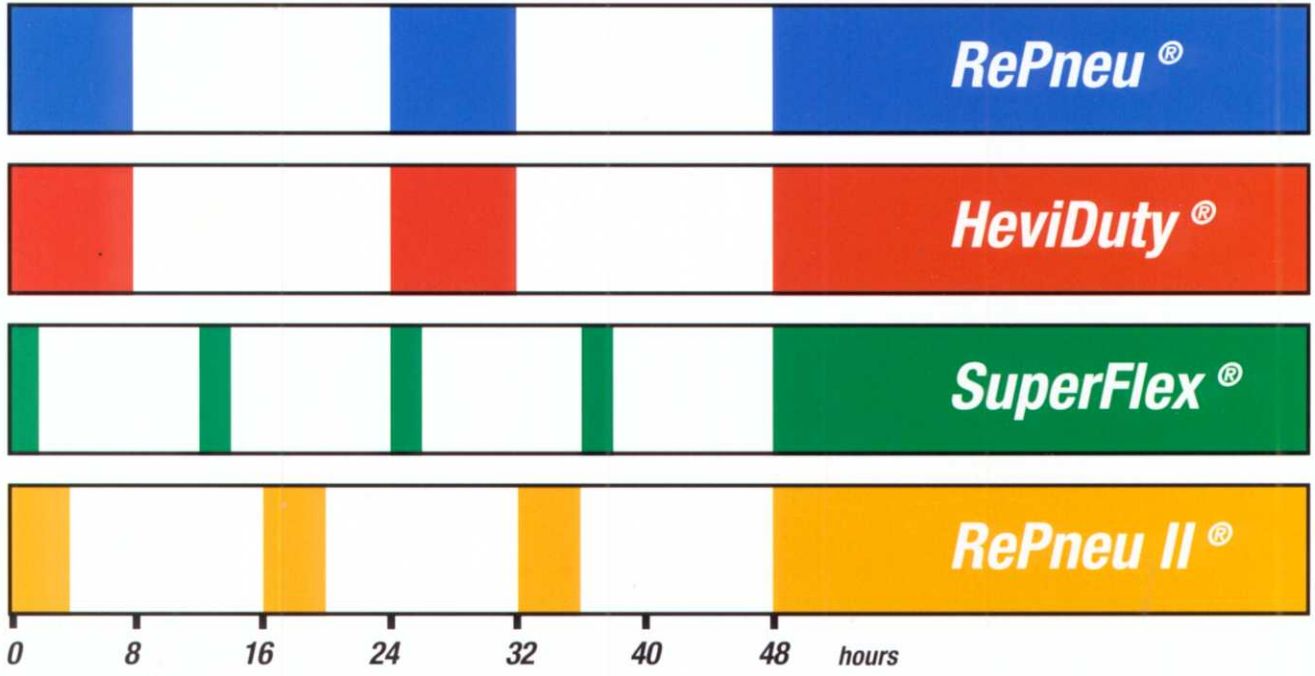

1. This is a limited warranty - see reverse for terms and conditions.
 2. White designates cool down period.



The Tire Flatproofing Experts